

TECHNICAL DESCRIPTION

CHARACTERISTICS

APPLICATIONS

COMPARATIVE ADVANTAGES

COLORS

CONTACT



APPLICATIONS

RESURFACING OF:

EXISTING CERAMIC TILE AND ANY OTHER
TILE SURFACE.

OLD SMOOTH CONCRETE, AND
KITCHEN AND BATH COUNTER TOPS.

EXISTING CONCRETE SURFACES
WHERE CARPET HAS BEEN REMOVED.

DRYWALL OR PLASTER WALLS

SHOWER ENCLOSURES.

FURNITURE.

BATH TUBS

CONCRETE SURFACES

STAIRS AND STEPS.





CHARACTERISTICS


In most cases, polished MicroCement can be applied over existing surfaces.


Polished MicroCement is suitable for application on interior as well as exterior surfaces.

Exterior use: Patios, walk ways, etc.

Interior surface use: May be applied on numerous surfaces in homes, offices, and retail and commercial spaces.

The installation of polished MicroCement is exclusively done by trained and experienced personal.

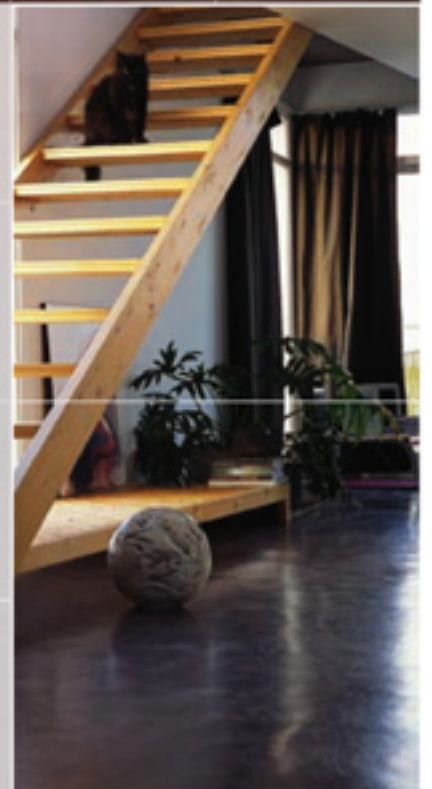



+ CHARACTERISTICS

Quick drying time: Within a few hours.

20 Standard colors that can be mixed and combined.

Custom colors are available upon request.

Polished MicroCement can be combined with other materials such as marble, wood, ceramic, stainless steel, as well as with other MicroCement colors.

The sanding and polishing process results in a smooth finished surface.

Minimum and easy maintenance: A damp cloth and wax are all that are required.

TECHNICAL DESCRIPTION

Polished MicroCement is a resurfacing cement based product which is 1-2 mm thick. Existing surfaces such as floors, walls, stairs and furniture can be renewed in a very short time. Polished MicroCement is a modern, functional and chic alternative which requires minimal maintenance.

The application and installation process of polished MicroCement does not produce large amounts of dirt and dust, and is much more convenient and cost effective than traditional renovations.

EXISTING SURFACES DO NOT NEED TO BE REMOVED

2 mm (5/64) THICKNESS

NO JOINTS ARE REQUIRED

May be applied over **FLOORS**: ceramic, marble, etc. **WALLS**: plaster, sheet-rock, tile, etc. **COUNTER TOPS** and **STAIRS**





**COMPARATIVE
ADVANTAGES**

Minimum thickness: only
2 mm.

Installation cleanup: Dust
from sanding. No rubble
or debris as in traditional
construction.

The removing of existing
flooring and surfaces is
not required.



STANDARD COLORS



AGRESTE




ARENA




AVELLANA



BLANCO

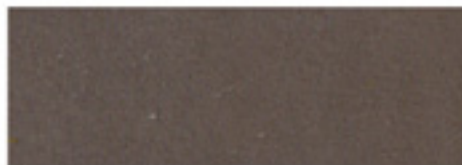


CHOCOLATE

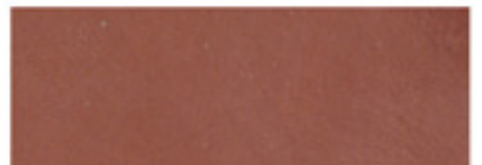


CIRUELO



COCO

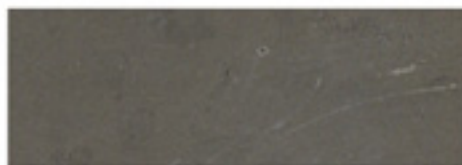


GRIS

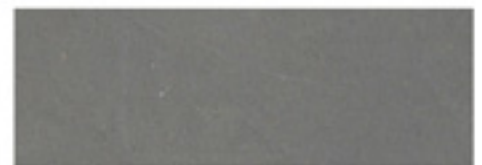

GRIS ACERO



GRIS CEMENTO

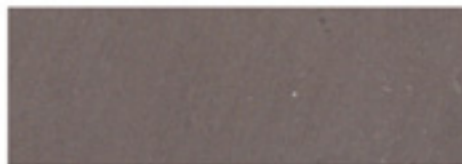


GRIS PLOMO




GRIS TEMPESTAD



OCRE

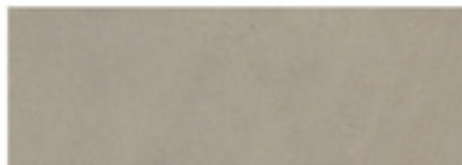


PLATA

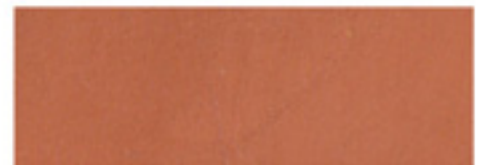

ROSA VICTORIANO




SAHARA

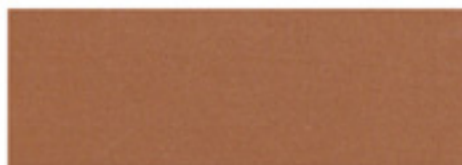


TEJANO



TERRACOTA

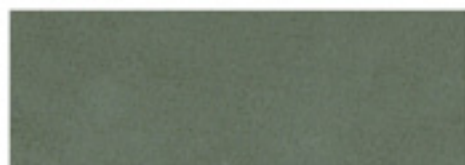

VERDE ALPE

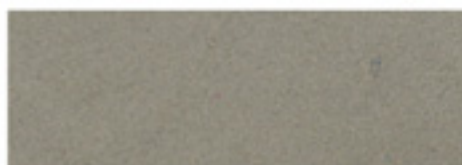

VERDE SECO

20 BASIC COLORS WHICH CAN
BE COMBINED WITH EACH
OTHER.

The color selection of this chart should be used only as a reference since the appearance is as close as possible to the real colors of MicroCement. The final color may vary from the colors of this chart.



Juan de Austria 95 - Atico 3° A° - Barcelona

Phone: +34 93 320 90 92

Fax: +34 93 320 90 93

e-mail: info@microcemento.com

www.microcemento.com

www.grupoedfan.com



MicroCemento®
is an EDFAN
product.

EDFAN
Ingeniería Civil